


poa

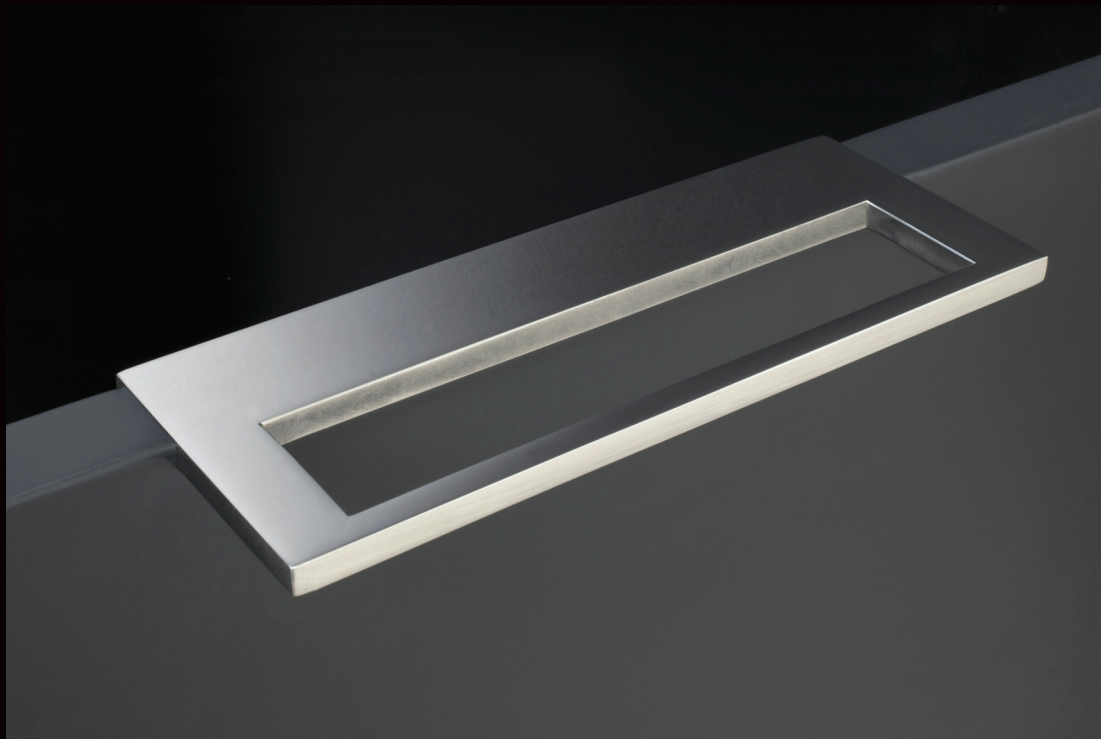

M A D E
I N I T A L Y

EVERYONE MILLWORK PULLS

PBA DESIGNS AND MANUFACTURES HANDLES FOR DOORS AND WINDOWS, PULL HANDLES, HANDRAILS, AND A SERIES OF OTHER ITEMS THAT ARE A FUNDAMENTAL PART OF CREATING BARRIER-FREE ENVIRONMENTS. INTERNATIONAL ARCHITECTS AND DESIGNERS OFTEN TURN TO PBA WHEN THEY NEED SPECIFIC SOLUTIONS FOR THEIR PROJECT, CONFIDENT KNOWING THAT THE COLLABORATION WILL BE FRUITFUL AND THE PRODUCTS WILL EMBODY QUALITY, CARE, AND INNOVATION. IT IS THIS APPROACH THAT LIES BEHIND THE CREATION OF PBA'S CUSTOM HANDLES THAT ARE ORIGINALLY DESIGNED TO FIT IN A SPECIFIC SETTING, THEN TURNED INTO SERIES THAT CAN BE USED IN OTHER BUILDINGS AND LOCATIONS. ALL OF PBA'S MANUFACTURING IS DONE IN ITS OWN PLANT IN THE VENEZIA AREA MAKING IT POSSIBLE TO CONSTANTLY MONITOR THE QUALITY OF THE RAW MATERIALS, THE MANUFACTURING TECHNOLOGIES, AND THE OUTPUT OF THE SKILLED WORKERS. COMBINING THESE FUNDAMENTAL ELEMENTS WITH THE CONTRIBUTIONS OF LEADING DESIGNERS PRODUCES A MIX OF SKILLS ABLE TO CREATE ITEMS DESIGNED NOT ONLY FOR A SPECIFIC LOCATION, BUT ALSO TO BE FUNCTIONAL AND WELL-SUITED FOR EVERYDAY USE.





pba S.p.A.




pba USA Inc.

PBA COLLABORATED WITH GENSLER, SERVING AS PRODUCT DESIGN CONSULTANT, ON THE EVERYONE MILLWORK PULLS COLLECTION. SCULPTED FOR ONE HAND OPENING AND CLOSING WITH NO PINCHING, WRIST TWISTING, OR SIMULTANEOUS HAND AND FINGER MANIPULATION REQUIRED, EACH PULL HAS A MINIMUM OPENING WIDTH OF 4" AND A MINIMUM OPENING DEPTH OF 1" (BASED ON TYPICAL DOOR/DRAWER DIMENSIONS). CRAFTED BY HAND OF AISI 316L STAINLESS STEEL – THE HARDEST, MOST RESISTANT, AND MOST ELASTIC OF STEELS – AND AVAILABLE IN A WIDE RANGE OF SIZES AND FINISHES, THEY ENSURE A BEAUTIFULLY MINIMAL SOLUTION FOR VIRTUALLY EVERY CUSTOM MILLWORK APPLICATION . . . AND EASY OPERATION FOR THE GREATEST RANGE OF USERS.

ALL PULLS IN THE COLLECTION WERE DESIGNED TO COMPLY WITH THE ADA AND SIMILAR ACCESSIBILITY REQUIREMENTS, HOWEVER FINAL INTERPRETATION OF ACCESSIBILITY COMPLIANCE IS THE RESPONSIBILITY OF THE SPECIFIER AND SHOULD BE DETERMINED RELATIVE TO SPECIFIC PROJECT CONDITIONS AND LOCAL CODES.

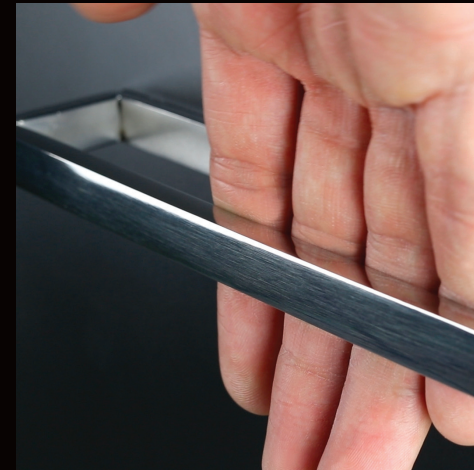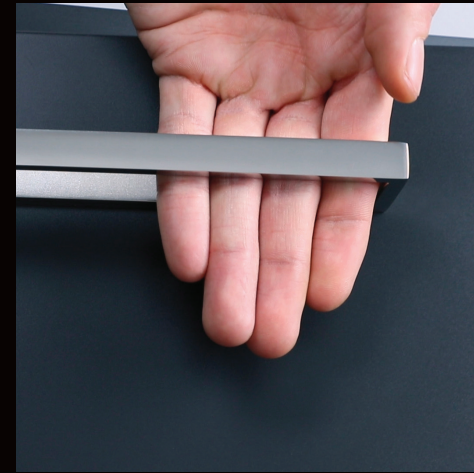

Finishes

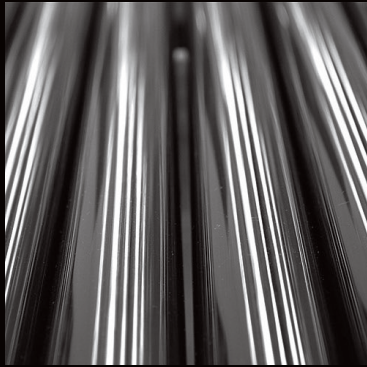


STAINLESS STEEL



Satin Bright*

* Stainless Steel Bright finish has a Satin inner profile.

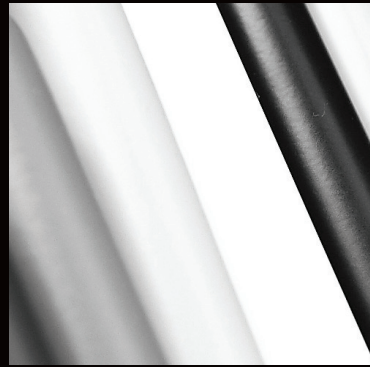

STAINLESS STEEL POWDER COATED



White Champagne Bronze



Grey Black



COPPER PLATED WITHOUT COATING



Semi-Bright

Copper plated finish can vary significantly from batch to batch.



WOOD



Ash Mahogany




Wenge White Oak

Wood is a natural material that varies in color, grain pattern and overall appearance and texture. Appearance can vary significantly from batch to batch.



LEATHER



Black Brown Other colors on request


Genuine leather is a natural material that may exhibit marks, lines, wrinkles, and color variation.

STAINLESS STEEL A M C



Transparent Satin Transparent Bright

PBA ANTIMICROBIAL COATING



MULTI-RESISTANT PATHOGENS DEVELOP WITHOUT PBA/AMC


PBA AMC REDUCES PATHOGENS BY 99.99%

STAINLESS STEEL POWDER COATED A M C



Black

PBA ANTIMICROBIAL COATING



MULTI-RESISTANT PATHOGENS DEVELOP WITHOUT PBA/AMC

PBA AMC REDUCES PATHOGENS BY 99.99%

STAINLESS STEEL PVD GOLD



Satin



on request

S-P-00344 EPD*
environdec.com



PBA ANTIMICROBIAL COATING (AMC)



THE USE OF PRODUCTS WITH ANTIMICROBIAL SURFACES IS BECOMING A MORE IMPORTANT WAY TO CREATE CLEANER, MORE HYGIENIC ENVIRONMENTS WITH REDUCED OPPORTUNITIES FOR THE PROLIFERATION AND TRANSMISSION OF GERMS. THE **PBA ANTIMICROBIAL COATING (AMC)** SURFACE FINISH IS A VALID ANSWER TO THIS BINDING NEED.

THE **PBA ANTIMICROBIAL COATING (AMC)** SURFACE FINISHING CONTAINS SPECIAL ADDITIVES THAT MAKE THE SURFACE PROTECTED FROM BACTERIA AND MICROORGANISMS. THE TESTS SHOW THAT ON UNTREATED SURFACES THE MICROBES AND BACTERIA CAN EASILY PROLIFERATE WHILE ON THE TREATED SURFACES THE BACTERIAL PROLIFERATION IS PRACTICALLY ZEROED.



THE FOUNDATION FOR SUCCESSFULLY FIGHTING GERM GROWTH CONSISTS OF A THREE ACTION MECHANISMS: BLOCKAGE OF PRIMARY CELL METABOLISM, STOPPAGE OF CELLULAR RESPIRATION, PREVENTION OF CELL DIVISION.

SURFACES WITH **PBA ANTIMICROBIAL COATING (AMC)** HAVE BEEN TESTED TO BE ACTIVE AGAINST GRAM-POSITIVE (STAPHYLOCOCCUS AUREUS - MRSA, BACILLUS SUBTILIS, STREPTOCOCCUS DAECALIS, AND OTHERS) AND GRAM-NEGATIVE BACTERIA (ESCHERICHIA COLI - ESBL, LEGIONELLA PNEUMOPHILA, PSEUDOMONAS AERUGINOSA AND OTHERS).

TRIED AND TESTED EFFICACY DEMONSTRATES THAT **PBA ANTIMICROBIAL COATING (AMC)** REDUCES MULTI-RESISTANT GERMS BY 99.99%.

PBA ANTIMICROBIAL COATING (AMC) IS RECOMMENDED FOR ALL THE HYGENE-SENSITIVE AREAS SUCH AS HOSPITALS AND RETIREMENT HOME, OFFICES AND RETAIL AND GENERALLY FOR PUBLIC BUILDINGS AND HOTELS.

ALL PBA PRODUCTS IN STAINLESS STEEL AND ALUMINUM CAN BE TREATED WITH **PBA ANTIMICROBIAL COATING (AMC)**.

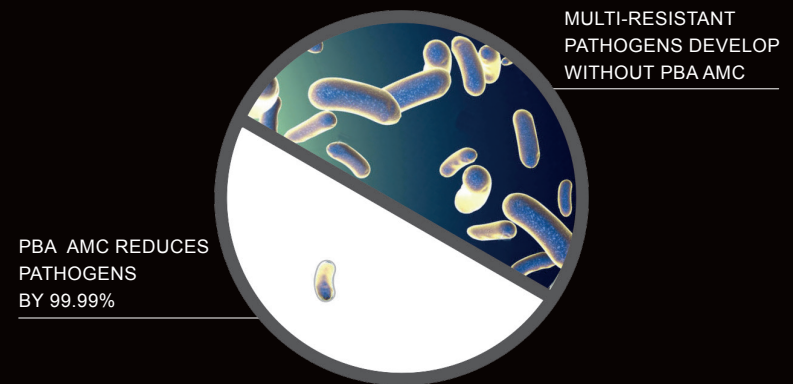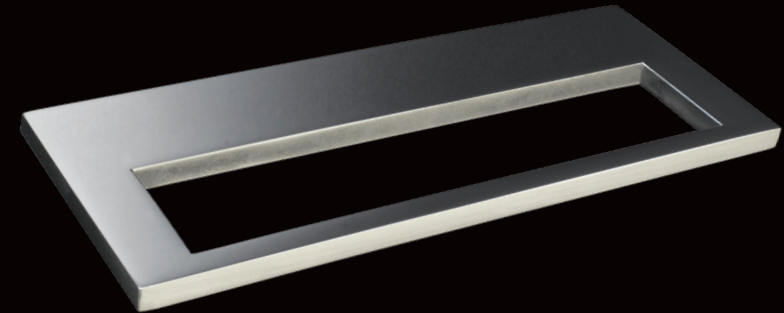

TRIED AND TESTED EFFICACY REDUCES MULTI-RESISTANT PATHOGENS BY 99.99%. (EFFECT OF ANTI-BACTERIAL ACTIVITY ON STAINLESS STEEL SURFACES.)

COPPER PLATED

EVERYONE MILLWORK PULLS HAVE A STAINLESS STEEL AISI 316L CORE WITH COPPER PLATING THAT IS LEFT UNCOATED. COPPER PLATING IS THE PROCESS OF DEPOSITING A COPPER LAYER ONTO STAINLESS STEEL FOR FUNCTIONAL AND DECORATIVE PURPOSES. THE COPPER LAYER IS MADE OF AN ALLOY WITH A MINIMUM OF 97% COPPER. THE MAIN USE OF COPPER PLATED STAINLESS STEEL IS FOR DOOR AND MILLWORK HARDWARE DUE TO THE ANTIMICROBIAL EFFICACY OF THE FINISH AND THE HIGH MECHANICAL RESISTANCE OF THE FABRICATIONS.


HOSPITAL EQUIPMENT MADE FROM COPPER ALLOYS CAN PLAY AN IMPORTANT ROLE IN COMPLEMENTING TRADITIONAL METHODS OF DISINFECTION. STUDIES ON THE ANTIMICROBIAL PROPERTIES OF COPPER AND ITS ALLOYS HAVE BEEN CONDUCTED USING VARIOUS METHODS.


THE STUDY REPORTED IN THE INTERNATIONAL JOURNAL OF ENVIRONMENTAL RESEARCH AND PUBLIC HEALTH CONFIRMED THE ANTIMICROBIAL PROPERTIES OF COPPER ALLOYS, SHOWING THAT COPPER KILLS GREATER THAN 99.9% OF THE MOST COMMON BACTERIA WITHIN 2 HOURS OF EXPOSURE: METHICILLIN-RESISTANT STAPHYLOCOCCUS AUREUS (MRSA), VANCOMYCIN-RESISTANT ENTEROCOCCUS FAECALIS (VRE), STAPHYLOCOCCUS AUREUS, ENTEROBACTER AEROGENES, PSEUDOMONAS AERUGINOSA, AND E. COLI O157:H7.

THESE BACTERIA ARE CONSIDERED TO BE REPRESENTATIVE OF THE MOST DANGEROUS PATHOGENS CAPABLE OF CAUSING SEVERE AND OFTEN FATAL INFECTIONS. THE CENTERS FOR DISEASE CONTROL AND PREVENTION (CDC) ESTIMATES THAT INFECTIONS ACQUIRED IN U.S. HOSPITALS AFFECT TWO MILLION INDIVIDUALS EVERY YEAR AND RESULT IN NEARLY 100,000 DEATHS ANNUALLY.


THE USE OF COPPER ALLOYS FOR FREQUENTLY TOUCHED SURFACES, AS A SUPPLEMENT TO EXISTING CDC PRESCRIBED HAND-WASHING AND DISINFECTION REGIMENS, HAS FAR-REACHING IMPLICATIONS. POTENTIAL USES OF THE COPPER IT CAN HELP TO REDUCE THE AMOUNT OF DISEASE-CAUSING BACTERIA IN HEALTHCARE, PUBLIC SPACES AND GENERALLY IN HIGH ATTENDANCE FACILITIES INCLUDES DOOR AND FURNITURE HARDWARE.

THE NEW ENGLAND JOURNAL OF MEDICINE RECENTLY REPORTED THAT COPPER, WHEN COMPARED TO OTHER MATERIALS INCLUDING PLASTIC AND STAINLESS STEEL, IS ALSO DRAMATICALLY LESS HOSPITABLE TO VIRUS.

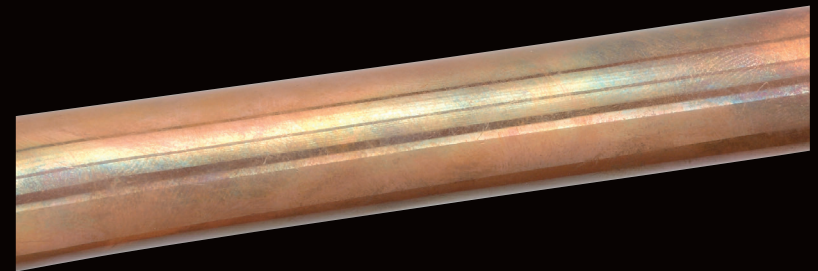


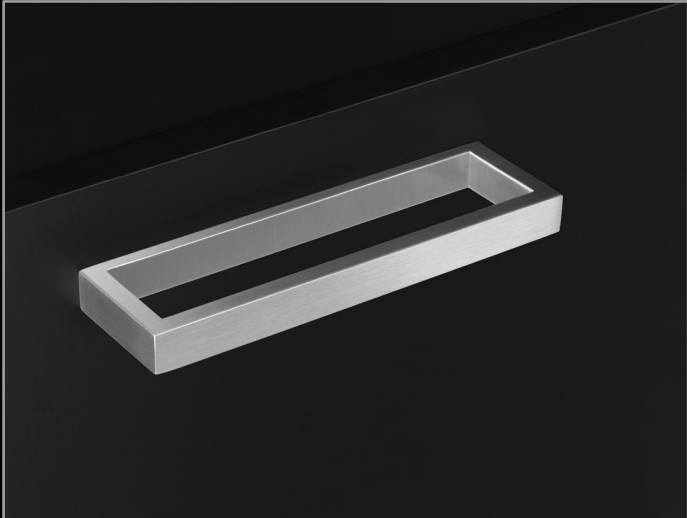


Design 1 - Surface Mounted

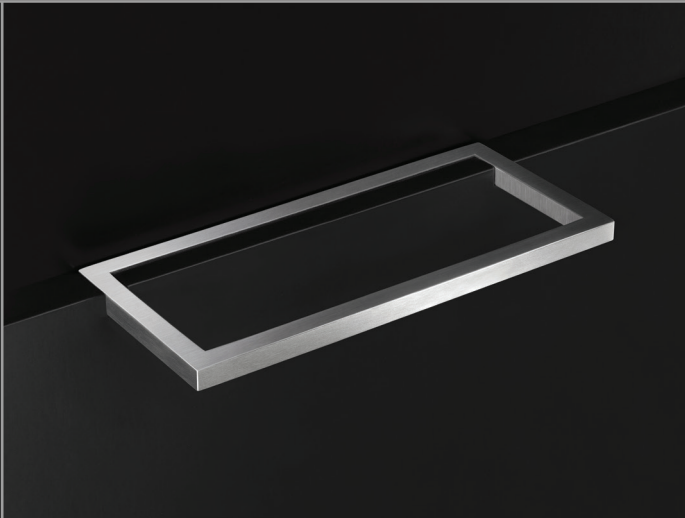


Design 2 - Edge Mounted

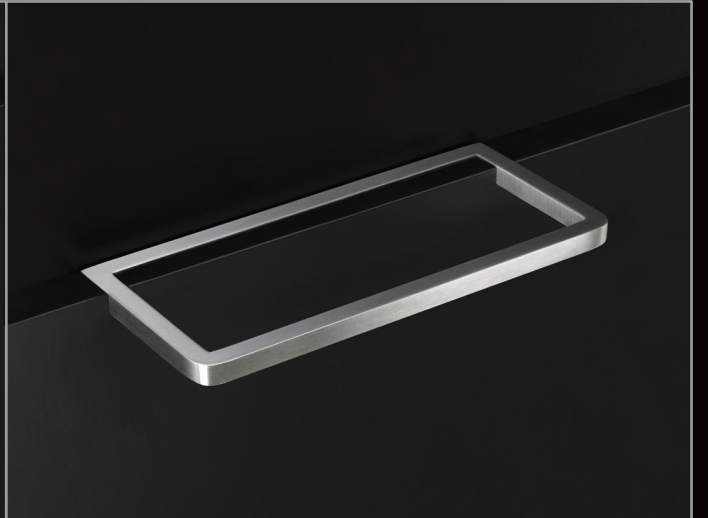


Design 2R - Edge Mounted

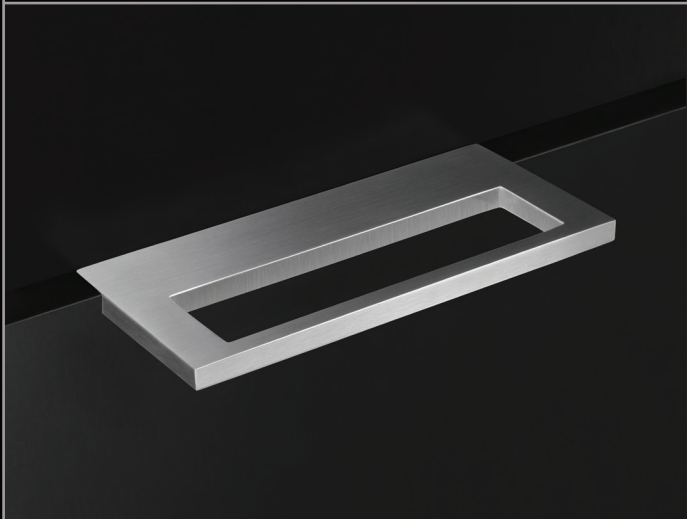

Design 3 - Edge Mounted

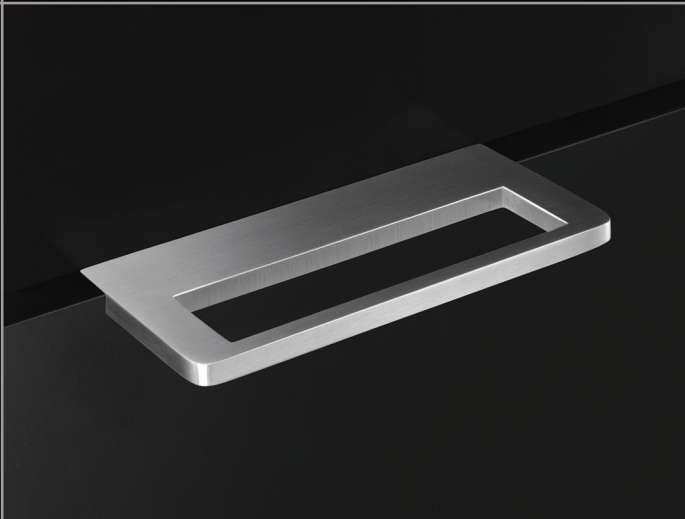

Design 3R - Edge Mounted

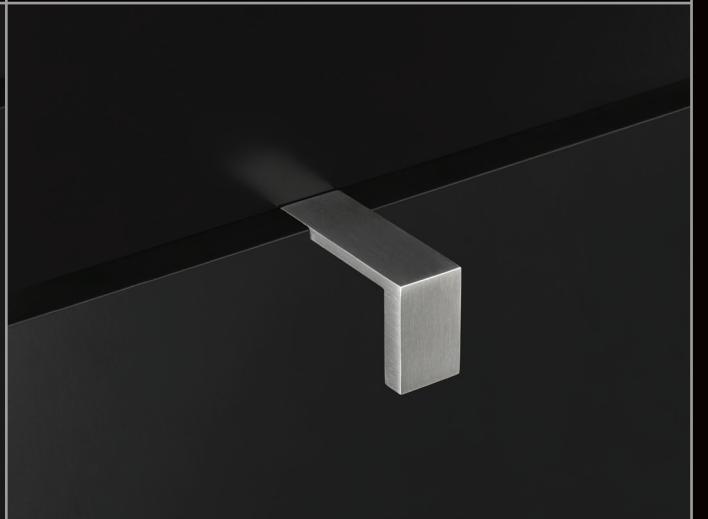

Design 4 - Edge Mounted




Design 5 - Surface Mounted



Design 6 - Surface Mounted



Design 7 - Surface Mounted

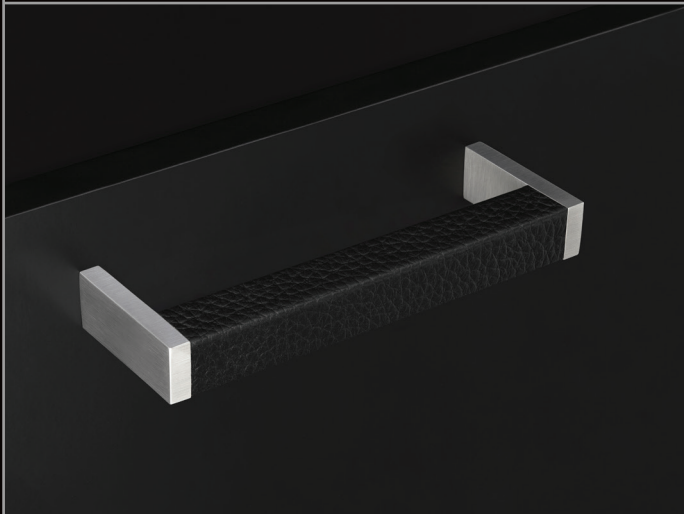

Design 8 - Surface Mounted



Design 9 - Surface Mounted

IDEA INTERNATIONAL DESIGN
EXCELLENCE AWARDS
FINALIST



EVERYONE MILLWORK PULLS

DESIGNS

EVERYONE MILLWORK PULLS





LEED®

EPD®
THE INTERNATIONAL EPD® SYSTEM


ECO PLATFORM
EPD
VERIFIED

Design 1

EVERYONE MILLWORK PULLS

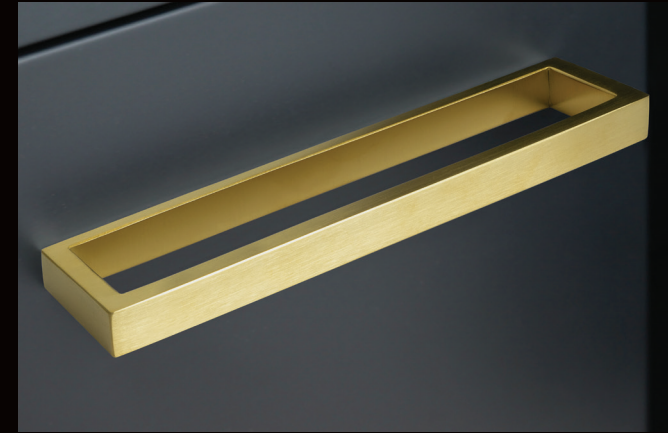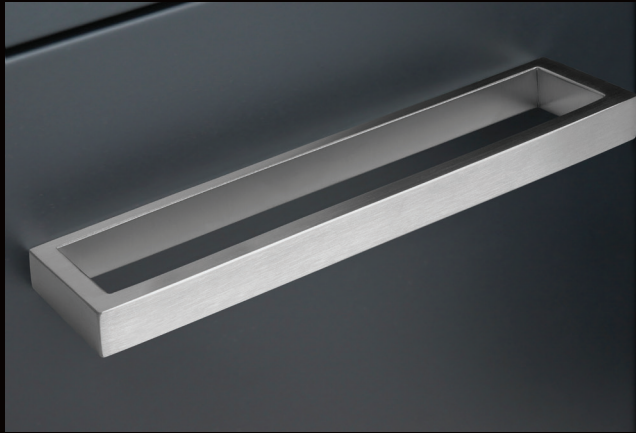


Design 1



FINISHES .XX

STAINLESS STEEL



Satin .44
Bright* .43

STAINLESS STEEL POWDER COATED



White .31
Champagne .38
Bronze .39

STAINLESS STEEL POWDER COATED AMC



Transparent Satin .99
Transparent Bright .99
Black .99

COPPER PLATED WITHOUT COATING



Semi-Bright .58

Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

ART.	A	B
GMP.D01.0005. xx	127 mm 5 in	37 mm 1 29/64"
GMP.D01.0006. xx	152,4 mm 6 in	37 mm 1 29/64"
GMP.D01.0007. xx	177,8 mm 7 in	37 mm 1 29/64"
GMP.D01.0008. xx	203,2 mm 8 in	37 mm 1 29/64"
GMP.D01.0009. xx	228,6 mm 9 in	37 mm 1 29/64"
GMP.D01.0010. xx	254 mm 10 in	37 mm 1 29/64"
GMP.D01.0011. xx	279,4 mm 11 in	37 mm 1 29/64"
GMP.D01.0012. xx	304,8 mm 12 in	37 mm 1 29/64"

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.






LEED®

EPD®
THE INTERNATIONAL EPD® SYSTEM


ECO PLATFORM
EPD
VERIFIED

Design 2

EVERYONE MILLWORK PULLS

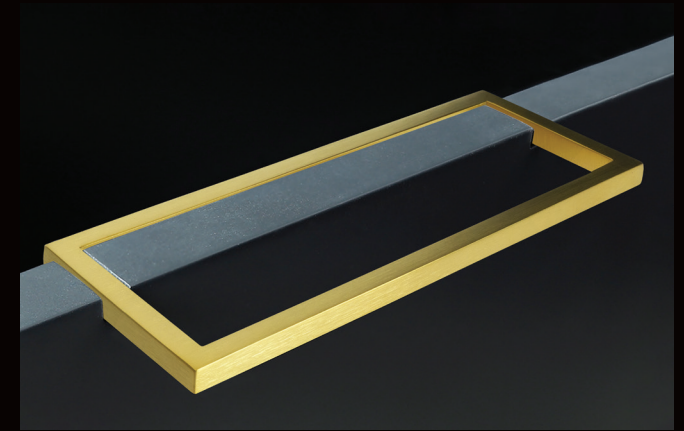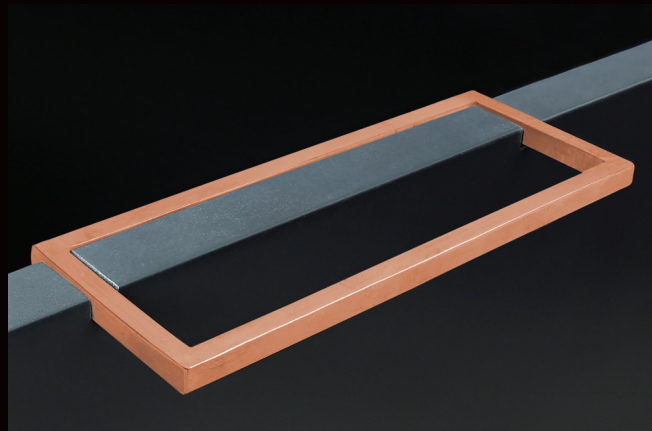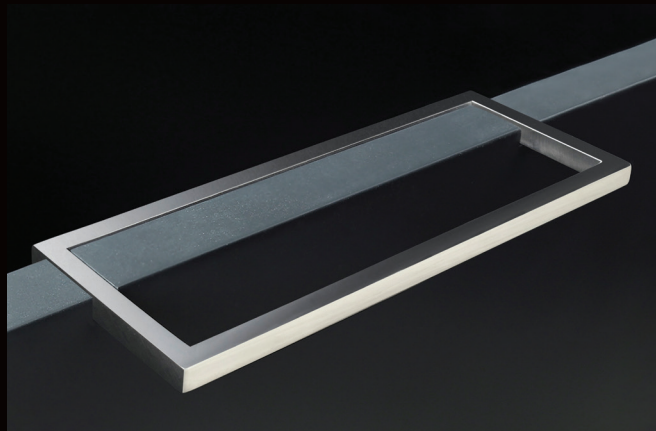


Design 2

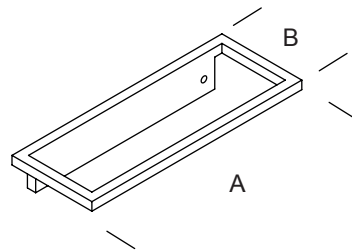

FINISHES .XX

STAINLESS STEEL



Satin .44
Bright* .43

STAINLESS STEEL POWDER COATED



White .31
Champagne .38
Bronze .39



Grey .32
Black .40

STAINLESS STEEL POWDER COATED AMC



Transparent Satin .99
Transparent Bright .99
Black .99

COPPER PLATED WITHOUT COATING



Semi-Bright .58

Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

ART.	A	B
GMP.D02.0005. xx	127 mm 5 in	58 mm 2 9/32"
GMP.D02.0006. xx	152,4 mm 6 in	58 mm 2 9/32"
GMP.D02.0007. xx	177,8 mm 7 in	58 mm 2 9/32"
GMP.D02.0008. xx	203,2 mm 8 in	58 mm 2 9/32"
GMP.D02.0009. xx	228,6 mm 9 in	58 mm 2 9/32"
GMP.D02.0010. xx	254 mm 10 in	58 mm 2 9/32"
GMP.D02.0011. xx	279,4 mm 11 in	58 mm 2 9/32"
GMP.D02.0012. xx	304,8 mm 12 in	58 mm 2 9/32"

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.






LEED®

EPD®
THE INTERNATIONAL EPD® SYSTEM



ECO PLATFORM
EPD
VERIFIED

Design 2R

EVERYONE MILLWORK PULLS

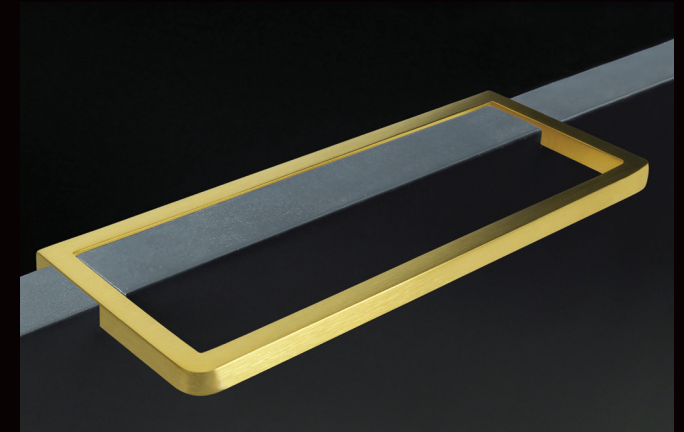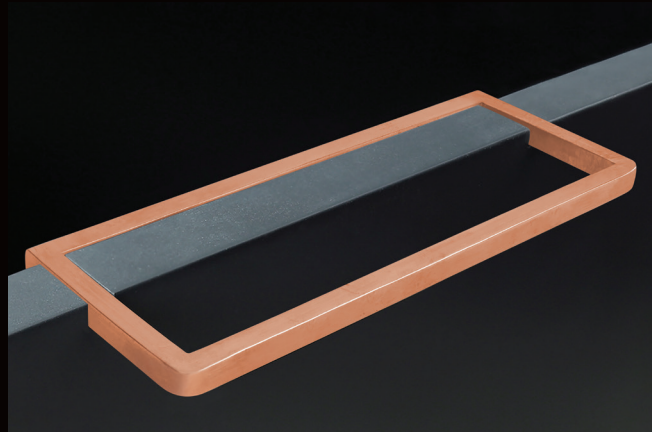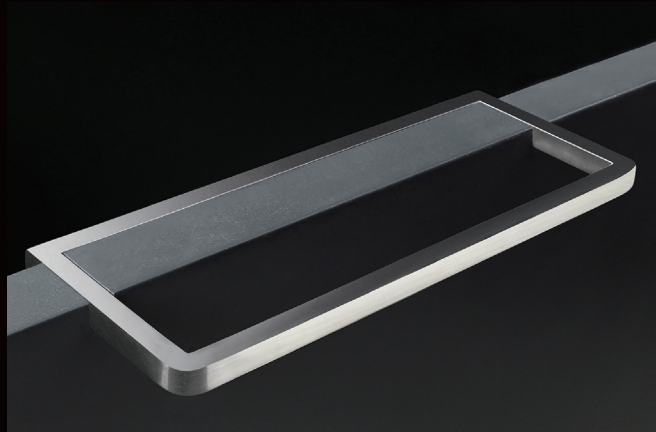


Design 2R

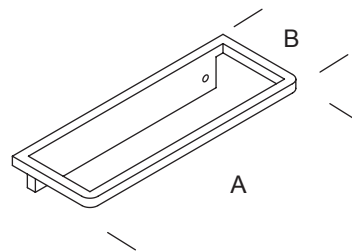

FINISHES .XX

STAINLESS STEEL



Satin .44
Bright* .43

STAINLESS STEEL POWDER COATED




White .31
Champagne .38
Bronze .39



Grey .32
Black .40

STAINLESS STEEL POWDER COATED AMC



Transparent Satin .99
Transparent Bright .99
Black .99

COPPER PLATED WITHOUT COATING



Semi-Bright .58

Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

ART.	A	B
GMP.D2R.0005. xx	127 mm 5 in	58 mm 2 9/32"
GMP.D2R.0006. xx	152,4 mm 6 in	58 mm 2 9/32"
GMP.D2R.0007. xx	177,8 mm 7 in	58 mm 2 9/32"
GMP.D2R.0008. xx	203,2 mm 8 in	58 mm 2 9/32"
GMP.D2R.0009. xx	228,6 mm 9 in	58 mm 2 9/32"
GMP.D2R.0010. xx	254 mm 10 in	58 mm 2 9/32"
GMP.D2R.0011. xx	279,4 mm 11 in	58 mm 2 9/32"
GMP.D2R.0012. xx	304,8 mm 12 in	58 mm 2 9/32"

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.





LEED®

EPD®
THE INTERNATIONAL EPD® SYSTEM


ECO PLATFORM
EPD
VERIFIED

Design 3

EVERYONE MILLWORK PULLS

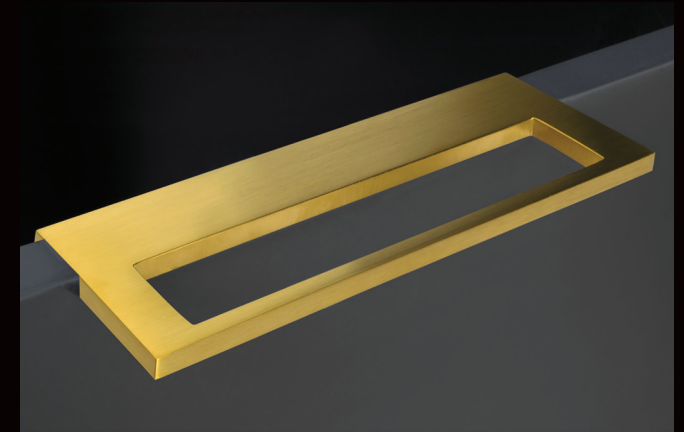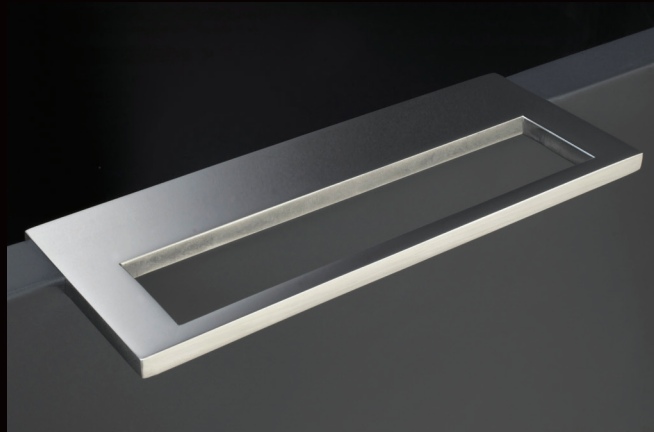


Design 3

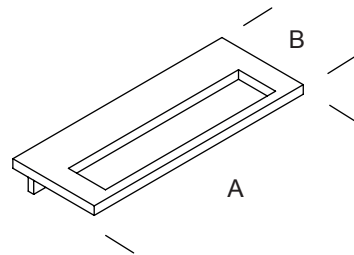

FINISHES .XX

STAINLESS STEEL



Satin .44
Bright* .43

STAINLESS STEEL POWDER COATED




White .31
Champagne .38
Bronze .39



Grey .32
Black .40

STAINLESS STEEL POWDER COATED AMC



Transparent Satin .99
Transparent Bright .99
Black .99

COPPER PLATED WITHOUT COATING



Semi-Bright .58

Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

ART.	A	B
GMP.D03.0005. xx	127 mm 5 in	58 mm 2 9/32"
GMP.D03.0006. xx	152,4 mm 6 in	58 mm 2 9/32"
GMP.D03.0007. xx	177,8 mm 7 in	58 mm 2 9/32"
GMP.D03.0008. xx	203,2 mm 8 in	58 mm 2 9/32"
GMP.D03.0009. xx	228,6 mm 9 in	58 mm 2 9/32"
GMP.D03.0010. xx	254 mm 10 in	58 mm 2 9/32"
GMP.D03.0011. xx	279,4 mm 11 in	58 mm 2 9/32"
GMP.D03.0012. xx	304,8 mm 12 in	58 mm 2 9/32"

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.





LEED®

EPD®
THE INTERNATIONAL EPD® SYSTEM



ECO PLATFORM
EPD
VERIFIED

Design 3R

EVERYONE MILLWORK PULLS

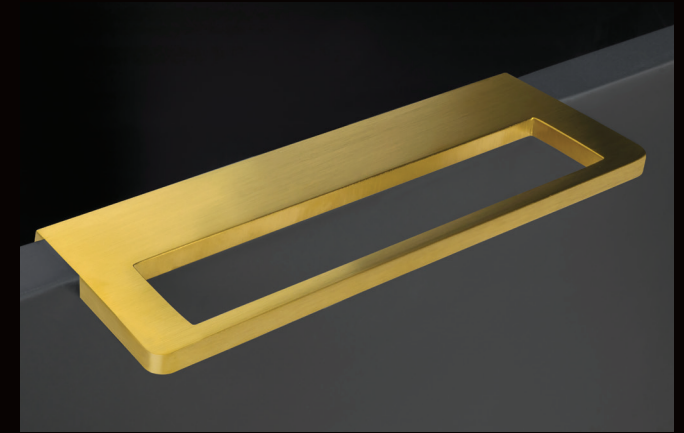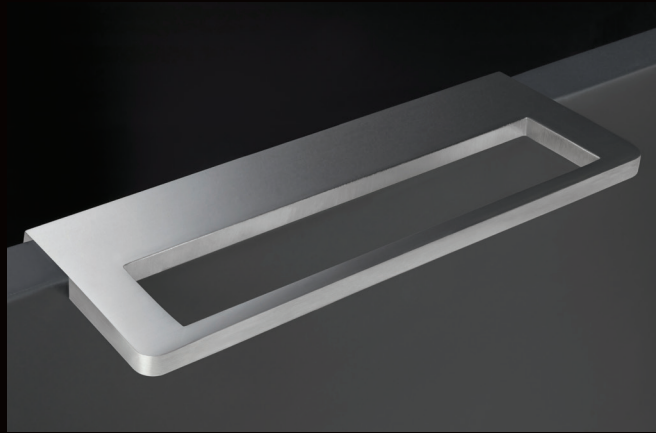


Design 3R

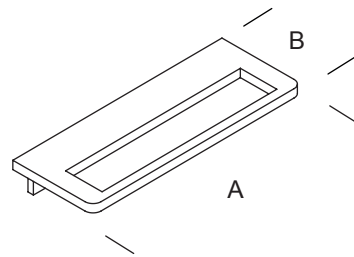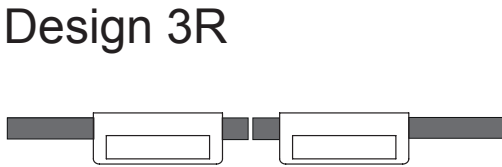

FINISHES .XX

STAINLESS STEEL



Satin .44
Bright* .43

STAINLESS STEEL POWDER COATED



White .31
Champagne .38
Bronze .39



Grey .32
Black .40

STAINLESS STEEL POWDER COATED AMC



Transparent Satin .99
Transparent Bright .99
Black .99

COPPER PLATED WITHOUT COATING



Semi-Bright .58

Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

ART.	A	B
GMP.D3R.0005. xx	127 mm 5 in	58 mm 2 9/32"
GMP.D3R.0006. xx	152,4 mm 6 in	58 mm 2 9/32"
GMP.D3R.0007. xx	177,8 mm 7 in	58 mm 2 9/32"
GMP.D3R.0008. xx	203,2 mm 8 in	58 mm 2 9/32"
GMP.D3R.0009. xx	228,6 mm 9 in	58 mm 2 9/32"
GMP.D3R.0010. xx	254 mm 10 in	58 mm 2 9/32"
GMP.D3R.0011. xx	279,4 mm 11 in	58 mm 2 9/32"
GMP.D3R.0012. xx	304,8 mm 12 in	58 mm 2 9/32"

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.





LEED®

EPD®
THE INTERNATIONAL EPD® SYSTEM





Design 4

EVERYONE MILLWORK PULLS

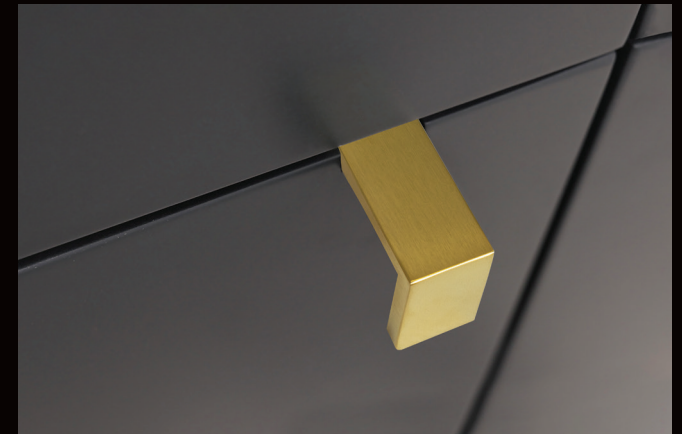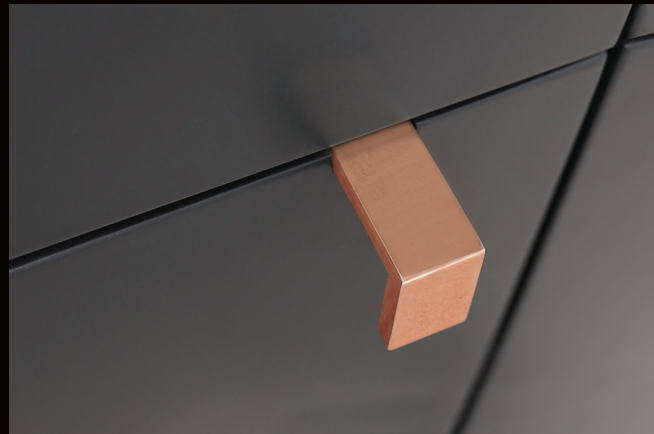


Design 4



ART.	A	B
GMP.D04.0005. xx	58 mm 2 9/32"	20 mm 25/32"

FINISHES .XX

STAINLESS STEEL



Satin .44
Bright* .43

STAINLESS STEEL POWDER COATED




White .31
Champagne .38
Bronze .39



Grey .32
Black .40

STAINLESS STEEL POWDER COATED AMC



Transparent Satin .99
Transparent Bright .99
Black .99

COPPER PLATED WITHOUT COATING



Semi-Bright .58

Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.



STAINLESS STEEL SATIN AND WHITE OAK AS PICTURED





STAINLESS STEEL PVD GOLD SATIN AND WENGE AS PICTURED



on request

Design 5



WOOD



Ash



Mahogany




Wenge



White Oak

FINISHES .XX

STAINLESS STEEL



Satin .44 Bright* .43

STAINLESS STEEL POWDER COATED



White .31 Champagne .38 Bronze .39



Grey .32 Black .40

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

ART.	A	B	ART.	A	B	ART.	A	B	ART.	A	B
GMP.D05.0A05.xx	127 mm	44 mm	GMP.D05.0M05.xx	127 mm	44 mm	GMP.D05.0W05.xx	127 mm	44 mm	GMP.D05.0B05.xx	127 mm	44 mm
	5 in	1 47/64"		5 in	1 47/64"		5 in	1 47/64"		5 in	1 47/64"
GMP.D05.0A06.xx	152,4 mm	44 mm	GMP.D05.0M06.xx	152,4 mm	44 mm	GMP.D05.0W06.xx	152,4 mm	44 mm	GMP.D05.0B06.xx	152,4 mm	44 mm
	6 in	1 47/64"		6 in	1 47/64"		6 in	1 47/64"		6 in	1 47/64"
GMP.D05.0A07.xx	177,8 mm	44 mm	GMP.D05.0M07.xx	177,8 mm	44 mm	GMP.D05.0W07.xx	177,8 mm	44 mm	GMP.D05.0B07.xx	177,8 mm	44 mm
	7 in	1 47/64"		7 in	1 47/64"		7 in	1 47/64"		7 in	1 47/64"
GMP.D05.0A08.xx	203,2 mm	44 mm	GMP.D05.0M08.xx	203,2 mm	44 mm	GMP.D05.0W08.xx	203,2 mm	44 mm	GMP.D05.0B08.xx	203,2 mm	44 mm
	8 in	1 47/64"		8 in	1 47/64"		8 in	1 47/64"		8 in	1 47/64"
GMP.D05.0A09.xx	228,6 mm	44 mm	GMP.D05.0M09.xx	228,6 mm	44 mm	GMP.D05.0W09.xx	228,6 mm	44 mm	GMP.D05.0B09.xx	228,6 mm	44 mm
	9 in	1 47/64"		9 in	1 47/64"		9 in	1 47/64"		9 in	1 47/64"
GMP.D05.0A10.xx	254 mm	44 mm	GMP.D05.0M10.xx	254 mm	44 mm	GMP.D05.0W10.xx	254 mm	44 mm	GMP.D05.0B10.xx	254 mm	44 mm
	10 in	1 47/64"		10 in	1 47/64"		10 in	1 47/64"		10 in	1 47/64"
GMP.D05.0A11.xx	279,4 mm	44 mm	GMP.D05.0M11.xx	279,4 mm	44 mm	GMP.D05.0W11.xx	279,4 mm	44 mm	GMP.D05.0B11.xx	279,4 mm	44 mm
	11 in	1 47/64"		11 in	1 47/64"		11 in	1 47/64"		11 in	1 47/64"
GMP.D05.0A12.xx	304,8 mm	44 mm	GMP.D05.0M12.xx	304,8 mm	44 mm	GMP.D05.0W12.xx	304,8 mm	44 mm	GMP.D05.0B12.xx	304,8 mm	44 mm
	12 in	1 47/64"		12 in	1 47/64"		12 in	1 47/64"		12 in	1 47/64"

* Stainless Steel Bright finish has a Satin inner profile
Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Wood is a natural material that varies in color, grain pattern and overall appearance and texture

Patent Number D936449



STAINLESS STEEL BRIGHT AND WHITE OAK AS PICTURED





STAINLESS STEEL PVD GOLD SATIN AND WENGE AS PICTURED



on request

Design 6



WOOD



Ash



Mahogany




Wenge



White Oak

FINISHES .XX

STAINLESS STEEL



Satin .44 Bright* .43

STAINLESS STEEL POWDER COATED



White .31 Champagne .38 Bronze .39



Grey .32 Black .40

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

ART.	A	B	ART.	A	B	ART.	A	B	ART.	A	B
GMPD06.0A05.xx	127 mm	48 mm	GMPD06.0M05.xx	127 mm	48 mm	GMPD06.0W05.xx	127 mm	48 mm	GMPD06.0B05.xx	127 mm	48 mm
	5 in	1 57/64"		5 in	1 57/64"		5 in	1 57/64"		5 in	1 57/64"
GMPD06.0A06.xx	152,4 mm	48 mm	GMPD06.0M06.xx	152,4 mm	48 mm	GMPD06.0W06.xx	152,4 mm	48 mm	GMPD06.0B06.xx	152,4 mm	48 mm
	6 in	1 57/64"		6 in	1 57/64"		6 in	1 57/64"		6 in	1 57/64"
GMPD06.0A07.xx	177,8 mm	48 mm	GMPD06.0M07.xx	177,8 mm	48 mm	GMPD06.0W07.xx	177,8 mm	48 mm	GMPD06.0B07.xx	177,8 mm	48 mm
	7 in	1 57/64"		7 in	1 57/64"		7 in	1 57/64"		7 in	1 57/64"
GMPD06.0A08.xx	203,2 mm	48 mm	GMPD06.0M08.xx	203,2 mm	48 mm	GMPD06.0W08.xx	203,2 mm	48 mm	GMPD06.0B08.xx	203,2 mm	48 mm
	8 in	1 57/64"		8 in	1 57/64"		8 in	1 57/64"		8 in	1 57/64"
GMPD06.0A09.xx	228,6 mm	48 mm	GMPD06.0M09.xx	228,6 mm	48 mm	GMPD06.0W09.xx	228,6 mm	48 mm	GMPD06.0B09.xx	228,6 mm	48 mm
	9 in	1 57/64"		9 in	1 57/64"		9 in	1 57/64"		9 in	1 57/64"
GMPD06.0A10.xx	254 mm	48 mm	GMPD06.0M10.xx	254 mm	48 mm	GMPD06.0W10.xx	254 mm	48 mm	GMPD06.0B10.xx	254 mm	48 mm
	10 in	1 57/64"		10 in	1 57/64"		10 in	1 57/64"		10 in	1 57/64"
GMPD06.0A11.xx	279,4 mm	48 mm	GMPD06.0M11.xx	279,4 mm	48 mm	GMPD06.0W11.xx	279,4 mm	48 mm	GMPD06.0B11.xx	279,4 mm	48 mm
	11 in	1 57/64"		11 in	1 57/64"		11 in	1 57/64"		11 in	1 57/64"
GMPD06.0A12.xx	304,8 mm	48 mm	GMPD06.0M12.xx	304,8 mm	48 mm	GMPD06.0W12.xx	304,8 mm	48 mm	GMPD06.0B12.xx	304,8 mm	48 mm
	12 in	1 57/64"		12 in	1 57/64"		12 in	1 57/64"		12 in	1 57/64"

* Stainless Steel Bright finish has a Satin inner profile
Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Wood is a natural material that varies in color, grain pattern and overall appearance and texture

Patent Number D939920






LEED®

EPD®
THE INTERNATIONAL EPD® SYSTEM




Design 7

EVERYONE MILLWORK PULLS

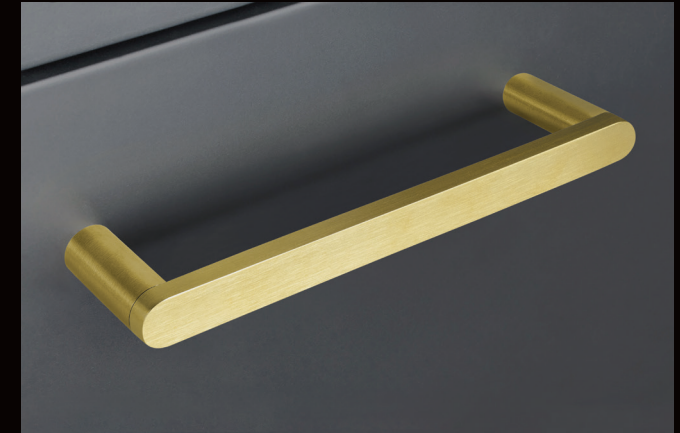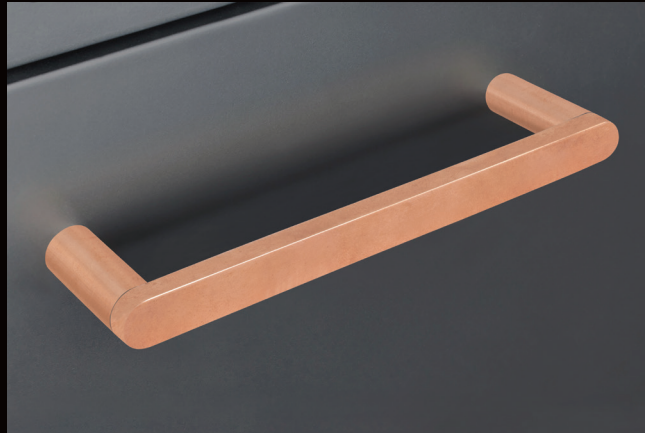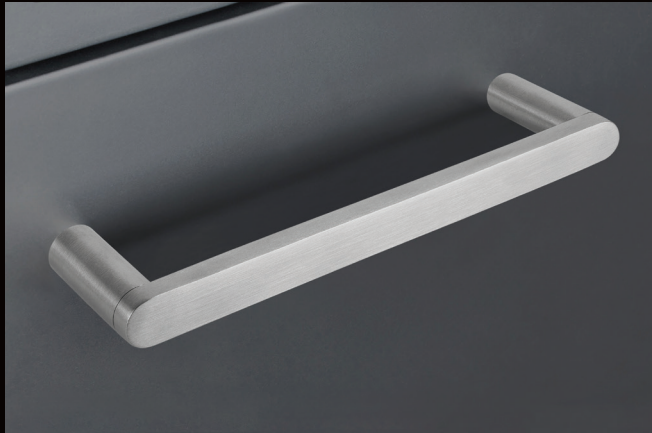


Design 7



FINISHES .XX

STAINLESS STEEL



Satin .44
Bright* .43

STAINLESS STEEL POWDER COATED



White .31
Champagne .38
Bronze .39



Grey .32
Black .40

STAINLESS STEEL POWDER COATED AMC



Transparent Satin .99
Transparent Bright .99
Black .99

COPPER PLATED WITHOUT COATING



Semi-Bright .58

Black burnished steel fixing screws
Copper plated finish can vary significantly from batch to batch

STAINLESS STEEL PVD GOLD




Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces


ART.	A	B
GMP.D07.0005. xx	127 mm 5 in	37 mm 1 29/64"
GMP.D07.0006. xx	152,4 mm 6 in	37 mm 1 29/64"
GMP.D07.0007. xx	177,8 mm 7 in	37 mm 1 29/64"
GMP.D07.0008. xx	203,2 mm 8 in	37 mm 1 29/64"
GMP.D07.0009. xx	228,6 mm 9 in	37 mm 1 29/64"

* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

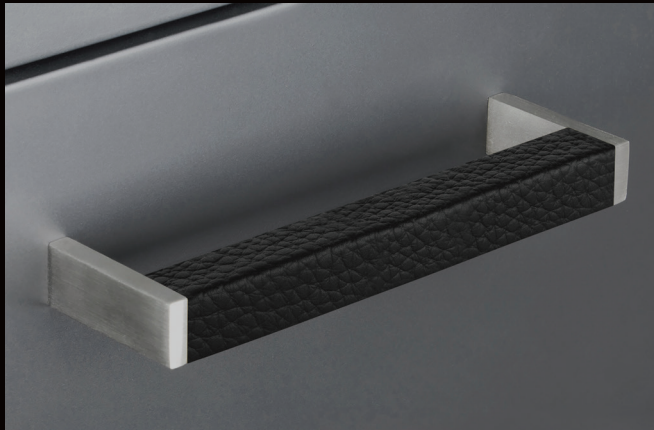

STAINLESS STEEL SATIN AND BLACK LEATHER AS PICTURED


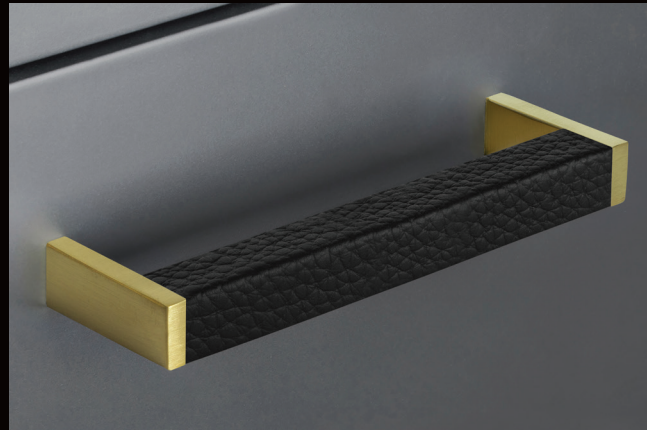


STAINLESS STEEL PVD GOLD SATIN AND BLACK LEATHER AS PICTURED

S-P-00344 EPD*
environdec.com



Design 8



LEATHER



Black




Brown



Colors on request - Minimum order quantity 10 pieces

FINISHES .XX

STAINLESS STEEL



Satin .44
Bright* .43

STAINLESS STEEL POWDER COATED



White .31
Champagne .38
Bronze .39



Grey .32
Black .40

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

ART.	A	B	ART.	A	B	ART.	A	B
GMPD08.BL05.xx	127 mm	44 mm	GMPD08.BR05.xx	127 mm	44 mm	GMPD08.9L05.xx	127 mm	44 mm
	5 in	1 47/64"		5 in	1 47/64"		5 in	1 47/64"
GMPD08.BL06.xx	152,4 mm	44 mm	GMPD08.BR06.xx	152,4 mm	44 mm	GMPD08.9L06.xx	152,4 mm	44 mm
	6 in	1 47/64"		6 in	1 47/64"		6 in	1 47/64"
GMPD08.BL07.xx	177,8 mm	44 mm	GMPD08.BR07.xx	177,8 mm	44 mm	GMPD08.9L07.xx	177,8 mm	44 mm
	7 in	1 47/64"		7 in	1 47/64"		7 in	1 47/64"
GMPD08.BL08.xx	203,2 mm	44 mm	GMPD08.BR08.xx	203,2 mm	44 mm	GMPD08.9L08.xx	203,2 mm	44 mm
	8 in	1 47/64"		8 in	1 47/64"		8 in	1 47/64"
GMPD08.BL09.xx	228,6 mm	44 mm	GMPD08.BR09.xx	228,6 mm	44 mm	GMPD08.9L09.xx	228,6 mm	44 mm
	9 in	1 47/64"		9 in	1 47/64"		9 in	1 47/64"
GMPD08.BL10.xx	254 mm	44 mm	GMPD08.BR10.xx	254 mm	44 mm	GMPD08.9L10.xx	254 mm	44 mm
	10 in	1 47/64"		10 in	1 47/64"		10 in	1 47/64"
GMPD08.BL11.xx	279,4 mm	44 mm	GMPD08.BR11.xx	279,4 mm	44 mm	GMPD08.9L11.xx	279,4 mm	44 mm
	11 in	1 47/64"		11 in	1 47/64"		11 in	1 47/64"
GMPD08.BL12.xx	304,8 mm	44 mm	GMPD08.BR12.xx	304,8 mm	44 mm	GMPD08.9L12.xx	304,8 mm	44 mm
	12 in	1 47/64"		12 in	1 47/64"		12 in	1 47/64"


* Stainless Steel Bright finish has a Satin inner profile

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Genuine leather is a natural material that may exhibit marks, lines, wrinkles, and color variation.



STAINLESS STEEL SATIN AND BLACK LEATHER AS PICTURED


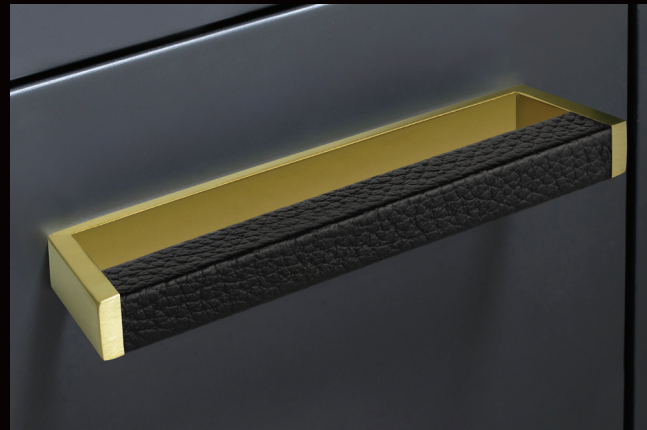


STAINLESS STEEL PVD GOLD SATIN AND BLACK LEATHER AS PICTURED

S-P-00344 EPD*
environdec.com



Design 9



LEATHER



Black




Brown



Colors on request - Minimum order quantity 10 pieces

FINISHES .XX

STAINLESS STEEL



Satin .44
Bright* .43

STAINLESS STEEL POWDER COATED



White .31
Champagne .38
Bronze .39



Grey .32
Black .40

STAINLESS STEEL PVD GOLD



Satin .80

Black or white burnished steel fixing screws
Minimum order quantity 10 pieces

ART.	A	B	ART.	A	B	ART.	A	B
GMPD09.BL05.xx	127 mm	48 mm	GMPD09.BR05.xx	127 mm	48 mm	GMPD09.9L05.xx	127 mm	48 mm
	5 in	1 57/64"		5 in	1 57/64"		5 in	1 57/64"
GMPD09.BL06.xx	152,4 mm	48 mm	GMPD09.BR06.xx	152,4 mm	48 mm	GMPD09.9L06.xx	152,4 mm	48 mm
	6 in	1 57/64"		6 in	1 57/64"		6 in	1 57/64"
GMPD09.BL07.xx	177,8 mm	48 mm	GMPD09.BR07.xx	177,8 mm	48 mm	GMPD09.9L07.xx	177,8 mm	48 mm
	7 in	1 57/64"		7 in	1 57/64"		7 in	1 57/64"
GMPD09.BL08.xx	203,2 mm	48 mm	GMPD09.BR08.xx	203,2 mm	48 mm	GMPD09.9L08.xx	203,2 mm	48 mm
	8 in	1 57/64"		8 in	1 57/64"		8 in	1 57/64"
GMPD09.BL09.xx	228,6 mm	48 mm	GMPD09.BR09.xx	228,6 mm	48 mm	GMPD09.9L09.xx	228,6 mm	48 mm
	9 in	1 57/64"		9 in	1 57/64"		9 in	1 57/64"
GMPD09.BL10.xx	254 mm	48 mm	GMPD09.BR10.xx	254 mm	48 mm	GMPD09.9L10.xx	254 mm	48 mm
	10 in	1 57/64"		10 in	1 57/64"		10 in	1 57/64"
GMPD09.BL11.xx	279,4 mm	48 mm	GMPD09.BR11.xx	279,4 mm	48 mm	GMPD09.9L11.xx	279,4 mm	48 mm
	11 in	1 57/64"		11 in	1 57/64"		11 in	1 57/64"
GMPD09.BL12.xx	304,8 mm	48 mm	GMPD09.BR12.xx	304,8 mm	48 mm	GMPD09.9L12.xx	304,8 mm	48 mm
	12 in	1 57/64"		12 in	1 57/64"		12 in	1 57/64"

* Stainless Steel Bright finish has a Satin inner profile


Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

Genuine leather is a natural material that may exhibit marks, lines, wrinkles, and color variation.


Sizes

AVAILABLE SIZES FOR EACH MODEL


Design 1




Design 5




Design 2




Design 6




Design 2R




Design 7*




Design 3




Design 8



Design 3R



Design 9



304,8 mm
12 in



279,4 mm
11 in



254 mm
10 in



228,6 mm
9 in



203,2 mm
8 in



177,8 mm
7 in



152,4 mm
6 in



127 mm
5 in



* Not available 10 in, 11 in, 12 in sizes

Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.

TECHNICAL INFORMATION

EVERYONE MILLWORK PULLS

TECHNICAL INFORMATION AND MAINTENANCE

Chemical composition of AISI Stainless Steel grades

Material - Stainless Steel	C %	Cr %	Ni %	Mo %
AISI 316L (1.4404)*	0,03 max	16.0-18.0	10.0-14.0	2.00-3.00

*Standard pba

Estimated pit corrosion time - time to penetrate 1 mm (years) by steel type

Location - Stainless Steel	Marine	Semi-industrial	Rural
Stainless Steel AISI 316 (1.4401)	260	525	1200

Source: The British Stainless Steel Association [BSSA]

*The stainless steel AISI 316L is an austenitic alloy. It is distinguished from others inoxidizable steels by the high percentage of molybdenum which gives it a special resistance to pitting corrosion and stress corrosion. In this kind stainless steel the nickel's presence is increased in order to guarantee stability. Further, the "L" stays for low carbon and in fact the quantity is less or equal to 0,03%. This feature prolongs the chrome carbides precipitation's time and avoids the risk of intergranular corrosion during the welding process.


Copper

Material	U.S. EPA Classification	Thickness	Copper plating process
CU ≥ 97%	Antimicrobial Copper Alloys - Group I	Min 8 µm	Copper Plating

●Standard pba

●Laboratory testing shows that, when cleaned regularly, antimicrobial copper surfaces kill greater than 99.9% of the following bacteria within 2 hours of exposure: MRSA, VRE, Staphylococcus aureus, Enterobacter aerogenes, Pseudomonas aeruginosa, and E. coli O157:H7. Antimicrobial copper surfaces are a supplement to and not a substitute for standard infection control practices and have been shown to reduce microbial contamination, but do not necessarily prevent cross contamination or infections; users must continue to follow all current infection control practices.

MAINTENANCE

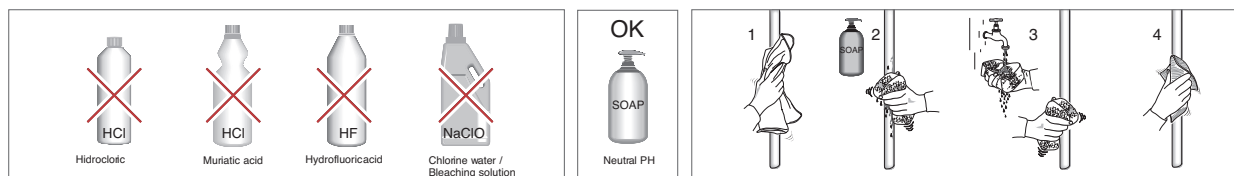

Do not use:
chlorine, water plus salt solution, acid or alcoholic solution to avoid damaging the copper plated finish.

pba Antimicrobial Coating (AMC) needs the same care of standard powder-coated surfaces.

ADA

The Americans with Disabilities Act of 2010 (ADA) states that door and gate hardware shall be operable with one hand and shall not require tight grasping, pinching or twisting of the wrist. Moreover, a maximum force of 5 pounds (22,2 N) is required to operate the hardware. All pba millwork pulls presented in this brochure were designed and produced to comply with the above requirements. Final interpretation of ADA compliance is the responsibility of the specifier and should be determined relative to specific project conditions and local codes.

ENVIRONMENTAL PRODUCT DECLARATION (EPD)



The Collection features the [Environmental Product Declaration \(EPD\)](#). An EPD is an ISO Environmental Declaration based on ISO 14025 and ISO 21930 standards, transparently reporting the environmental performance of products or services from a lifecycle perspective. The preparation of an EPD encompasses various stages, from acquiring raw materials to the end of the product's life. EPDs adhere to international standards and consider the entire value chain. Additionally, the EPD is a third-party verified document. We are proud to offer the EPD for our products, available in the EPD Library.

PBA PRODUCTS CONTRIBUTE TOWARD SATISFYING PREREQUISITES AND CREDITS UNDER LEED

LEED® (Leadership in Energy Environmental Design) is a voluntary certification system for the management, design and construction of buildings that are sustainable from a social, environmental and economic point of view and in terms of the wellbeing of the users. Established in the United States in 1993 by the U.S. Green Building Council (USGBC), LEED is now the most widespread building sustainability certification standard in the world. It considers every field that involves the design and management of buildings or neighbourhoods, both commercial and residential new or undergoing requalification.

DECLARE LABEL



The Everyone Millworkpull collection offers a [Declare Label Red List Free](#). The Declare Label is like a nutrition label for the building industry. It is a product transparency disclosure that lists the ingredients in products to help customers ensure healthier indoor living environments. It discloses where a product comes from, the materials it is made from, and its end-of-life pathway. The International Living Future Institute hosts a transparency platform and product database featuring Declare that helps stakeholders in the building industry find products free from hazardous substances. The Declare Label has been approved as a compliance pathway for the green building certification system LEED v4. Declare labels that achieve a declaration status of "Red List Free" fulfill the credit disclosure requirements. The Red List contains the worst in class materials prevalent in the building industry, which pollute the environment, bio-accumulate to toxic levels in the food chain, and/or are harmful to construction and factory workers.

AMC

pba ANTI-MICROBIAL COATING (AMC) is a powder-coated containing special silver ions additives that make the surface protected from bacteria and microorganisms. The tests show that on untreated surfaces the microbes and bacteria can easily proliferate, while on AMC surfaces the bacterial proliferation is practically zeroed.

COPPER PLATED


The finish is uncover copper plated, therefore, over time copper naturally changes color – transforming from a shiny brown color to darker browns, then blues and finally greens after a number of years. This change in color, due to the natural oxidation called "patina" doesn't affect the antimicrobial activity that remains constant.

PVD

Physical Vapor Deposition (PVD) is a superficial metal coating using a vacuum deposition methods which to produce thin films and coatings. PVD is characterized by a process in which the material goes from a condensed phase to a vapor phase and then back to a thin film condensed phase. The metal film is obtained by a complete physical process and therefore possesses higher technical characteristics than any other chemical or electro-chemical process. PVD coating is particularly recommended for all those innovative quality products which require high chemical and technical features (resistance to abrasion, scratches, and corrosion) and at the same time offers a wide choice of chromatic colors.

INSTALLATION NOTES

- Everyone Millwork Pulls shall not be used on appliance doors when the appliance is firmly connected to the door.
- Hardwood or medium-density fiberboard (MDF) substrates are recommended when Design 2, Design 2R, Design 3, Design 3R and Design 4 pulls are used. Lesser grade materials, such as particle board, could affect connection strength.

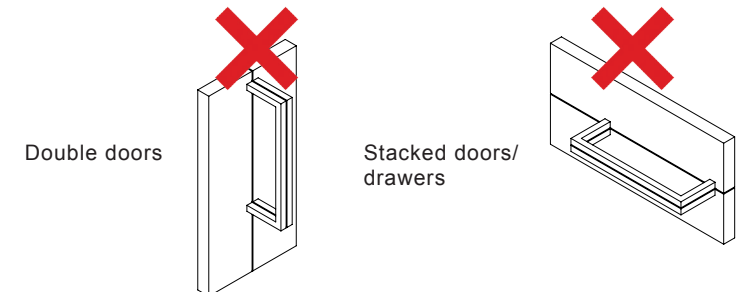

GENERAL CONDITIONS OF SALE

1. AGREEMENT

1.1 The supply of the products shown in this pricelist ("Products") of PBA SpA ("PBA") shall be governed by these general conditions of sale ("General Conditions"). These General Conditions shall apply also to the sale of spare parts, when possible.

1.2 The sale agreement of the Products ("Agreement") is entered into force among the parties upon the Client's receipt of PBA's order confirmation.

These General Conditions shall be deemed as an integral and essential part of any Agreement.

1.3 These General Conditions shall be executed by the Client and attached to the first purchase order sent to PBA, it being agreed that they shall accordingly apply to any following Agreement.

1.4 These General Conditions shall be deemed as tacitly accepted by the Client for any supply of Products, unless expressly rejected in writing by the Client by means of notice thereof to be sent to PBA at the latest within 5 (five) days as of the date of receipt of PBA's confirmation of the first purchase order sent by the Client.

Should the Client expressly reject one or more of these General Conditions within the above term, PBA shall be free to withdraw from the relevant Agreement, by means of written communication thereof and without any further obligation.

1.5 In no event shall any general conditions of any nature, inserted and/or specified in the Client's order forms and/or in other documents sent to PBA by the Client, and/or of which the latter was made aware in any manner whatsoever, apply to any Agreement and/or to any supply of Products.

Any special term and/or condition of supply suggested by the Client shall apply to the Agreement only if expressly contained in PBA's order confirmation.

Any change and/or amendment to these General Conditions shall be binding and valid only if accepted in writing by both parties.

2. PLACE AND TERMS OF DELIVERY OF THE PRODUCTS

2.1 The choice of an Incoterm does not affect the location of the place of delivery of the Products which, in any case, shall be deemed as delivered to the Client at the place and in the moment in which they are put at disposal of the haulier, for the relevant transport, at PBA's premises in Tezze sul Brenta (Vicenza), Italy.

In any case, unless otherwise agreed in writing by the parties, PBA shall never be liable for delays accrued during the transportation.

2.2 The terms of delivery of the Products (i) are specified in PBA's order confirmation, (ii) are approximate and roughly set forth and (iii) in no case shall they be construed as of essence.

2.3 In case of delay in the delivery of the Products at PBA's premises, caused by a fortuitous event, force majeure or other causes not depending on PBA's willful misconduct and/or gross negligence, the Client shall not be entitled to claim any compensation for damages, nor to ask for the termination of the Agreement and/or for the reduction of the price of the Products.

3. INCOTERMS

Unless otherwise agreed in writing, the Products and the relevant prices are to be considered with delivery Ex-works (EXW – Incoterms 2000), PBA's premises in Tezze sul Brenta (VI), Italy or at the different place indicated by PBA in the notice Products ready for delivery.

4. ORDERS – NON STANDARD AND/OR MADE TO MEASURE PRODUCTS

4.1 The purchase orders shall be made in writing and completed with all the data required for the relevant design and manufacture.

4.2 When already approved by the Client for the supply of catalogue Products, it is agreed that these General Conditions shall also apply to the sale orders related to non standard Products, Products out of catalogue and/or to be made to measure, if confirmed by PBA.

4.3 Any delay of the Client in the transmission of data, measures and/or technical specifications of the Products subject matter of the Agreement may cause a proportional postponement of the delivery terms, to be newly determined by PBA on the basis of its industrial needs.

5. PRICES AND PAYMENTS

5.1 The prices of the Products indicated in this pricelist are merely indicative and can be modified at any time by PBA.

The actual price of the Products is specified in PBA's order confirmation and, unless otherwise specified, it is deemed as net of VAT.

Any change and/or modification of the Products, agreed by the parties after the transmission of PBA's order confirmation, shall cause the adjustment of the relevant price due to any increase of the costs of production and/or of the raw materials, as agreed from time to time by the parties.

5.2 The price of the Products shall be paid by the Client as per the terms and ways specified in PBA's order confirmation, or otherwise agreed by the parties.

Any late collection or non collection of the Products shall not cause an extension and/or postponement of the terms of payment.

5.3 PBA shall be entitled to suspend the delivery of the Products should: (a) the Client's assets and/or financial standings endanger the relevant payment; (b) the Client fail to timely pay Products previously supplied by PBA, also on the basis of other Agreements, until full payment of the outstanding credit and/or until receipt of proper guarantees of the Client for any delivery in progress, without prejudice to PBA's right to claim for any damages suffered as a consequence thereof.

5.4 In no event shall any vice and/or defect of the Products, even when expressly acknowledged as such by PBA, and/or any delay of delivery as to the agreed terms give the Client the right to suspend the relevant payments and/or any other payment for whichever reason due to PBA also under other contractual relationships.

5.5 In case of late payments, PBA shall be entitled to charge interests on the unpaid amount at the rate provided by the law.

5.6 In no case shall the Client be entitled to set off any amount due to PBA in force of any Agreement against any amount due by PBA at any title whatsoever.

6. RETENTION OF TITLE

PBA shall be the sole owner of the Products until the date of their full payment.

Should the Agreement be terminated due to the Client's breach of contract, any Client's advance payment shall be kept by PBA as an indemnity within the limits set forth by the law, without prejudice to the latter's right to claim for further damages.

7. WARRANTY

7.1 PBA guarantees that the Products will be free from vices and defects in materials and workmanship for a period of 24 (twenty-four) months as of the date of the relevant delivery ("Warranty Period").

7.2 Should the complaints raised by the Client within the Warranty Period with reference to the Products be grounded and accepted by PBA, the latter shall, at its exclusive discretion, repair and/or replace the defective Product/s or the defective component/s of the same, with delivery Ex-works (EXW Incoterms 2000) PBA's premises in Tezze sul Brenta (VI), Italy.

The warranty obligations herewith undertaken shall be effective and binding only provided that PBA has the opportunity to verify the vices and/or defects raised by the Client.

PBA's warranty obligation shall be deemed as entirely fulfilled with the removal of the vice and/or defect raised by the Client, or with the replacement of the defective Product and/or component, without any further obligations.

Unless otherwise agreed in writing by the parties, all the expenses for returning to PBA the defective Products and/or components, as well as all the additional expenses related to the operations of repair or replacement shall be borne by the Client and shall be at the Client's risk.

7.3 Subject to the loss of warranty, the Client shall notify in writing, by registered letter return receipt requested, any vices and/or defects found within and not later than 8 (eight) days as of the date of the actual delivery of the Products, or, in case of hidden vices or defects, within and not later than 8 (eight) days as of the date of the relevant discovery.

7.4 The warranty is expressly excluded for vices and/or defects of the Products arising from or consisting in:

- (i) any repair, alteration and/or modification not authorized in writing by PBA;
- (ii) normal wear and tear of the materials or of single components;
- (iii) improper use and/or application of the Products;
- (iv) defects and/or mistakes in the measures and/or technical specifications supplied by the Client;
- (v) deposit, maintenance and/or cleaning not in compliance with PBA's instructions;
- (vi) installation not in compliance with PBA's instructions and/or carried out with non suitable materials;
- (vii) any other event for which PBA is not directly liable.

Should the Client fail to regularly pay the agreed price, even if such - default or such delay concerns a single part of the aggregate price of the Products, the warranty shall not apply.

7.5 Without prejudice to the compulsory product's liability law and any liability for willful misconduct and/or gross negligence, PBA shall not be liable for direct, indirect or incidental damages caused to the Client and/or to third parties as a consequence of the defects of the Products. The Client shall not be entitled to terminate the Agreement in case of vices and/or defects of the Products subject matter of this warranty, should PBA timely comply with the relevant obligations.

7.6 The Products made of wood, pvc, rubber, rolled sections and/or of other natural materials shall be of a quality equal, within the limits of a reasonable similarity, to the relevant samples examined by the Client before the execution of the Agreement.

In no case shall therefore the samples of the Products examined by the Client be qualified as the exclusive standard for the exterior appearance of the Products.

Without prejudice to the warranty regulated by this clause 7, any -chromatic and/or aesthetic difference (nervation of the wood, intensity of the colour shades, etc.) of the delivered Products compared to the characteristics of the relevant samples examined by the Client, shall not entitle the latter to terminate the Agreement and/or to ask for the replacement of the Products or for the reduction of the price.

7.7 In no event shall the chromatic differences between Products of the same type and/or colour, delivered with different lots and/or in different moments, be qualified as vices and/or defects of the Products, nor shall the Client be entitled to claim their replacement and/or the reduction of the relevant price as a consequence thereof.

8. MISPRINTS AND PRINTING ERRORS

We are not responsible for any misprint or printing error in catalogs or price lists. All images and sizes are not binding. Modifications are reserved. Design modifications are reserved to technically enhance products

9. EXCLUSIVE COURT

All disputes arising out of or relating to these General Conditions, any Agreement and/or to the supply of Products shall be exclusively submitted to and settled by the Court of Vicenza, Italy.

PBA shall in any case be entitled, at its exclusive discretion, to institute legal proceedings against the Client before the Court of the place where the Client has its registered office.

10. APPLICABLE LAW

These General Conditions of sale and any Agreement shall be governed by Italian Law.

Should the Client be a foreign entity or in any case an entity having the registered office or the main place of business abroad, the Contracts related to the supply of the Products shall in any case be regulated by the United Nations Convention on the International Sale of Goods (Wien Convention, April 11, 1980)

11. WAIVER

Failure by PBA to enforce at any time the provisions of these General Conditions shall not be construed as a waiver of such provision or of the right to thereafter enforce each and every provision herein.

12. LANGUAGE

The Client executes these General Conditions in Italian and in English, it being agreed that should any conflict or inconsistency arise among the two versions, the Italian wording shall always prevail.

pba S.p.A.

T +39 0424 5451 info@pba.it www.pba.it

pba USA, Inc.

T +1 212 255 4605 salesusa@pba-usa.us www.pba.it

pba S.p.A. Deutschland

T +49 2151 820060 info@de.pba.it www.pba.it